

TSP-5G THERMOSTAT





- · Automatically calculate the electricity bill.
- · Support multiple languages; English, French and Spanish.
- The 2.4G/5G/AP mode can connect within 10S. The smart app is simple and fast.
- The crimping type wiring can complete in 10S, match different floor sensor resistance.
- · Capacitive touch screen is more sensitive and supports voice control.
- · Simple interaction and userface.

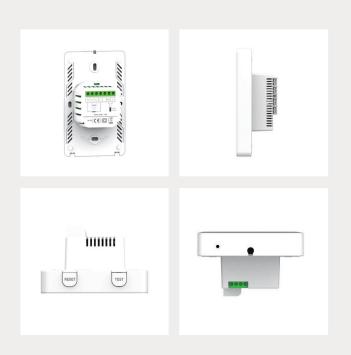

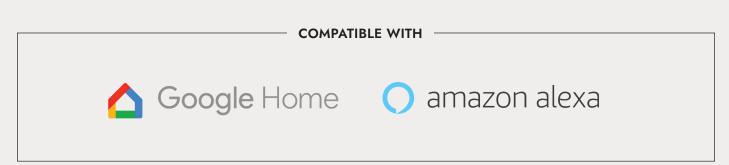



TSP-5G THERMOSTAT

TECHNICAL SPECIFICATION


Supply	120-240 Vac 50/60 Hz
Load	15A maximum (resistive load)
Setpoint range	From $+5^{\circ}$ C to $+40^{\circ}$ C / $+41$ to $+104^{\circ}$ F
Temperature range	From +5°C to +45°C / +41 to +113°F
Cover	IP21
Warranty	12 months manufacturer warranty
Approvals	ETL

Floor sensor type	B3950-10K/B3380-10K B3700-10K/B3600-12K
Programmable events	7 and 5+1+1
WIFI module	5G+2.4G
Dimensions	H: 129.5mm W: 81mm D: 50mm
Wall box	H: 76mm W: 50.8mm D: 50.8mm

INSTALLATION INSTRUCTION

Connect the power
Connect the load line
Connect the Floor sensor
12 to 22 AWG

Note: Disconnect the main power supply before wiring. If an electric Floor heating cable or mat system requires more than 15Amps, install a power module.

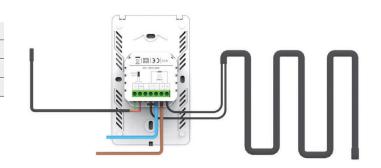



WARMTECH has heating experts and contractors nationwide, who will be pleased to provide more details on WARMTECH products and services. To contact your local WARMTECH distributor or to arrange a no-obligation FREE quotation, please call our freephone number.

